

SPECIFICATIONS

MODEL NUMBER	POWER	BORE	STROKE	RAM SPEED		CAPACITY (TONS)	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
				PRESS	RETURN			L	W	H
HFP-50T	2 HP 230 1 phase	6"	12"	8 IPM	9 IPM	50	1,200	52"	42"	80"
HFP-100T	5 HP 230 1 phase	8"	12"	9 IPM	12 IPM	100	2,400	58"	48"	84"

Standard voltages available - please specify when ordering.

H FRAME PRESSES 50 TON & 100 TON

STANDARD FEATURES ON ALL MODELS


- ✓ **Electric / Hydraulic operation** provides smooth, consistent pressing action.
- ✓ **Open sides** to facilitate work on long pieces.
- ✓ **Flat ram nose** can be easily changed to allow the user to adapt the press to a specific job.
- ✓ **Quality Baldor motor**, low speed.
- ✓ **Low speed pump** - quiet, dependable operation.
- ✓ **Self-locking table design** eliminates lateral movement.
- ✓ **Low pressure hydraulic system** maintains lower oil temperatures, resulting in higher efficiency and safer operation.

STANDARD FEATURES ON 100 TON

- ✓ **Pressure regulator** to limit the ram pressure.
- ✓ **Variable ram speed** allows operator to select the proper speed for the task.
- ✓ **Double-acting cylinder** permits pulling as well as pressing ram action.
- ✓ **Hydraulic power-lift** for vertical displacement of table.

DIMENSIONS (INCHES)

MODEL	A	B	C	D	E	F
HFP-50T	67	32	42	35	10	30
HFP-100T	75	42	54	30	13	30

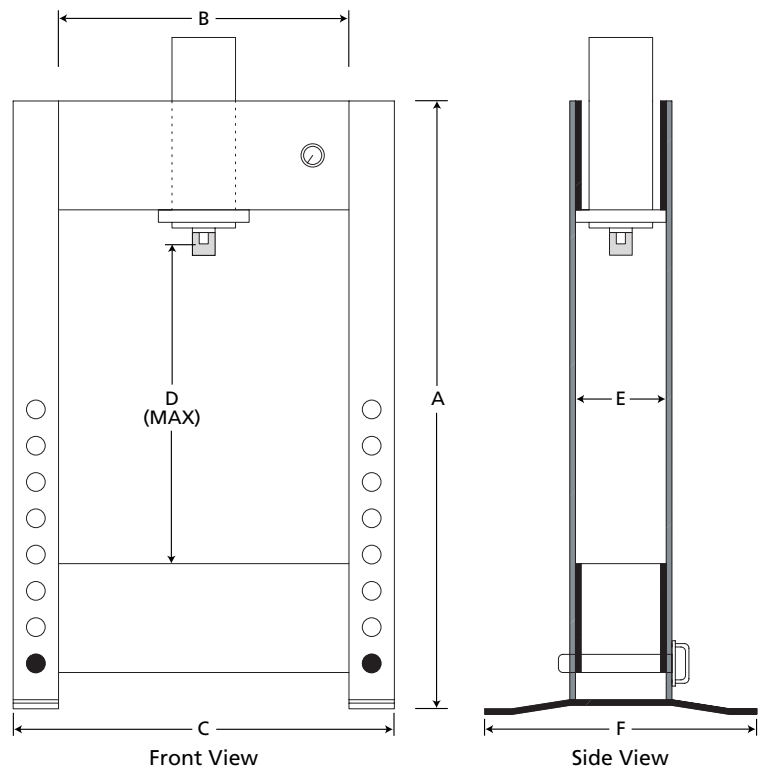

AVAILABLE OPTIONS

FPS	Foot pedal-electric solenoid valve for hands-free operation, c/w electric control panel.
ASC	Adjustable stroke control c/w foot pedal-electric solenoid valve and electric control panel.

Custom designs available
We Build Them your Way!

REVISED JANUARY 2006